



# WEISS INSTRUMENTS

## Lab & Test Thermometers

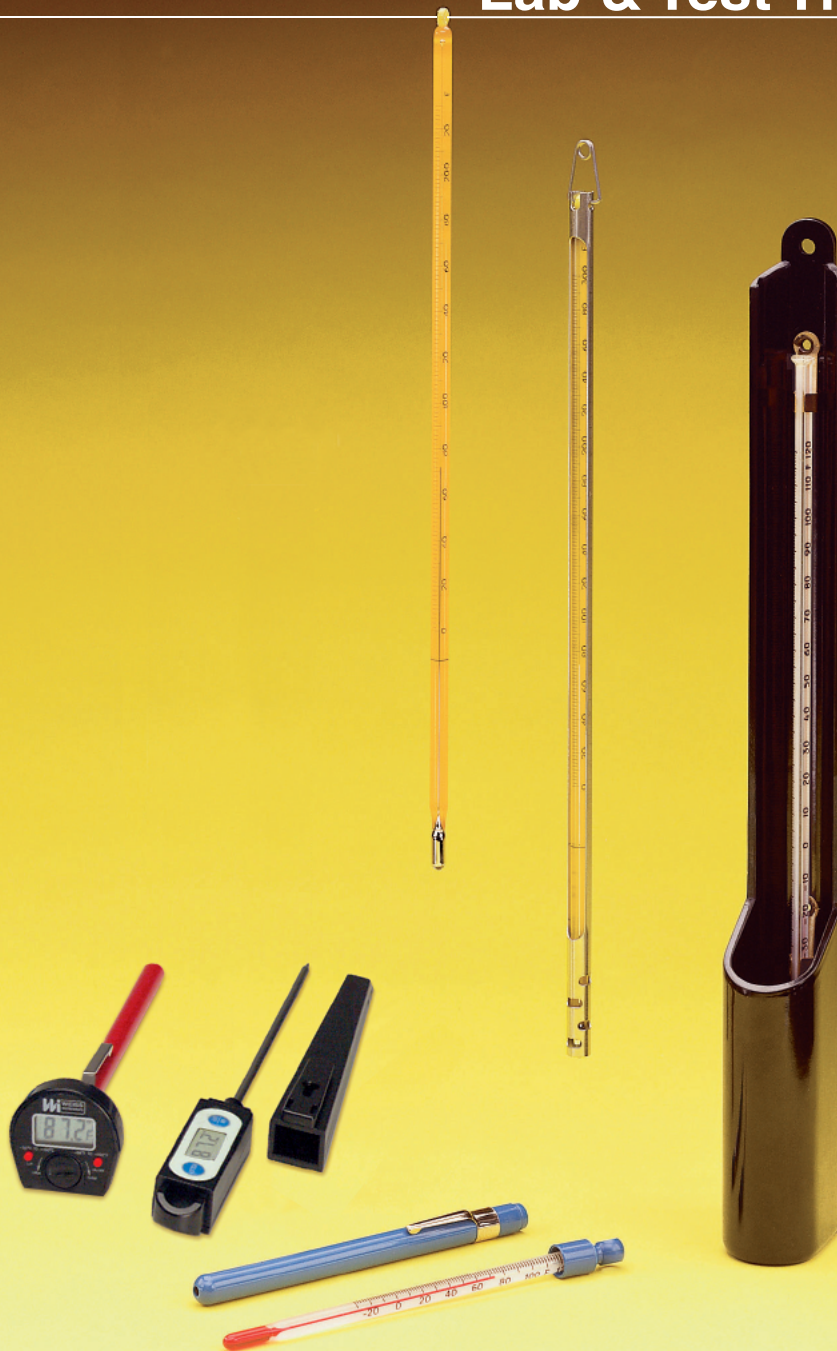

## POCKET CASE GLASS THERMOMETERS

Weiss Pocket Test Thermometers are available in red liquid and mercury filled types. Nylon case provided with pocket clip. Overall length is 6 inches.

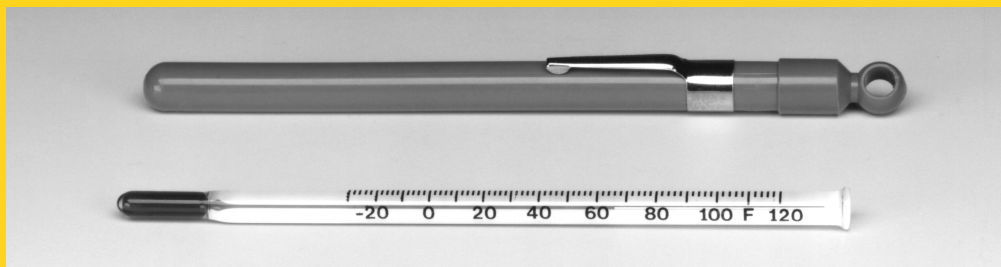

COMPLETE IN POCKET CASE		REFILLS ONLY		Temperature Range	Division
Red Liquid Cat. No.	Mercury Cat. No.	Red Liquid Cat. No.	Mercury Cat. No.		
PLC120	PMC120	PLR120	PMR120	-30/0/120°F	2°
PLC220	PMC220	PLR220	PMR220	0-220°F	2°

## POCKET CASE DIGITAL THERMOMETERS



CATALOG NO.	FEATURES	RANGE
DP300	Auto Off - °F/°C Switch	58/0/302F&C
DP300A	Auto Off - °F/°C Switch - Data Hold Waterproof	58/0/302F&C

## ASTM THERMOMETERS

ASTM Thermometers are made in strict accordance to rigid specifications of American Society for Testing Materials. Made in yellow back round form glass by skilled artisans and thoroughly inspected to assure that they meet these requirements in all details.


ASTM Catalog No.	Range	Sub Div.	Immersion	Length	ASTM Catalog No.	Range	Sub Div.	Immersion	Length
62F	-36/0/35°F	1/5°	Total	379mm	62C	-38/0/2°C	1/10°	Total	379mm
63F	18-89°F	1/5°	Total	379mm	63C	-8/0/32°C	1/10°	Total	379mm
64F	77-131°F	1/5°	Total	379mm	64C	25-55°C	1/10°	Total	379mm
65F	122-176°F	1/5°	Total	379mm	65C	50-80°C	1/10°	Total	379mm
66F	167-221°F	1/5°	Total	379mm	66C	75-105°C	1/10°	Total	379mm
67F	203-311°F	1/5°	Total	379mm	67C	95-155°C	1/5°	Total	379mm
68F	293-401°F	1/5°	Total	379mm	68C	145-205°C	1/5°	Total	379mm
69F	383-581°F	1/5°	Total	379mm	69C	195-305°C	1/2°	Total	379mm
70F	563-761°F	1/5°	Total	379mm	70C	295-405°C	1/2°	Total	379mm

NOTE: All ASTM Thermometers from Number 1 thru 110 are available upon request. Contact the factory for price and availability.

# SOLID GLASS ETCHED STEM THERMOMETERS

## Armored "Gold Braid" Standard Grade Thermometers

Gold Braid Thermometers are mercury filled with yellow-gold back round form glass.

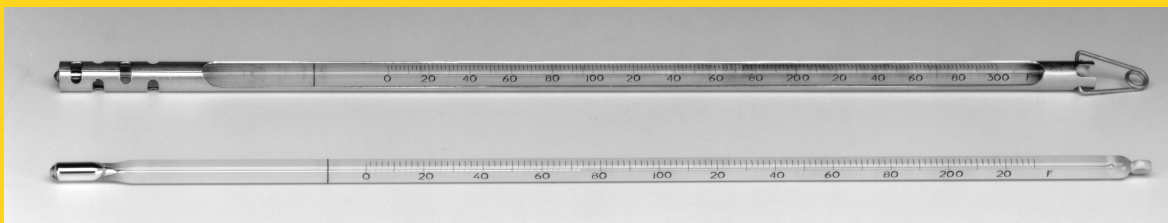

COMPLETE IN ARMOR					THERMOMETERS ONLY		
Total Imm.	3" Imm.	Length	Range	Div.	Total Imm.	3" Imm.	
Cat. No.	Cat. No.				Cat. No.	Cat. No.	
YT120-A	YP120-A	12"	-30/0/120°F	1°	YT120	YP120	
YT230-A	YP230-A	12"	0-230°F	2°	YT230	YP230	
YT300-A	YP300-A	12"	0-300°F	2°	YT300	YP300	
YT500-A	YP500-A	12"	20-500°F	2°	YT500	YP500	
YT750-A	YP750-A	12"	20-750°F	5°	YT750	YP750	
YT50-A	YP50-A	12"	-35/0/50°C	1°	YT50	YP50	
YT110-A	YP110-A	12"	-20/0/110°C	1°	YT110	YP110	
YT150-A	YP150-A	12"	-20/0/150°C	1°	YT150	YP150	
YT260-A	YP260-A	16"	-10/0/260°C	1°	YT260	YP260	
YT400-A	YP400-A	16"	-10/0/400°C	2°	YT400	YP400	

## SPECIAL GRADE FRACTIONAL DEGREE THERMOMETERS

These Thermometers are of the special precision, fractionally graduated type. Mercury filled, round glass, white back, single scale thermometers.

Total Imm.	3" Imm.	Length	Range	Div.	Total Imm.	3" Imm.	Length	Range	Div.
Cat. No.	Cat. No.				Cat. No.	Cat. No.			
WT124	WP124	18"	30-124°F	1/5°	WT51	WP51	18"	-1/0/51°C	1/10°
WT214	WP214	24"	30-214°F	1/5°	WT101	WP101	24"	-1/0/101°C	1/10°
WT394	WP394	24"	30-394°F	1/2°	WT201	WP201	24"	-1/0/201°C	1/5°

## DOUBLE SCALE °F and °C THERMOMETERS

Double Scale Thermometers are mercury filled with yellow back round glass.

Total Imm.	3" Imm.	Length	Fahrenheit	Div.	Centigrade	Div.
Cat. No.	Cat. No.					
YTD230	YPD230	12"	0-230°F	1°	-20/0/110°C	2°
YTD500	YPD500	16"	20-500°F	1°	-10/0/260°C	2°
YTD750	YPD750	16"	20-750°F	2°	-10/0/400°C	5°

## LOW RANGE RED SPIRIT FILLED THERMOMETERS

Because of the low range, these Thermometers have (red spirit) organic filling. Glass is white back round form.

Total Imm.	3" Imm.	Length	Fahrenheit	Div.	Total Imm.	3" Imm.	Length	Centigrade	Div.
Cat. No.	Cat. No.				Cat. No.	Cat. No.			
WRT150	WRP150	12"	-150/0/120°F	2°	WRT100	WRP100	12"	-100/0/50°C	1°
WRT58	WRP58	12"	-58/0/120°F	2°	WRT50	WRP50	12"	-50/0/50°C	1°

# TANKAGE GAUGING AND GENERAL USE THERMOMETERS

Tankage Gauging Cup Case Thermometers are designed to give accurate sampling temperatures. For use in storage tanks, vats and various general applications

The Weiss Series PC14 utilizes a 14" chemical resistant, heavy-duty plastic case with cup capacity of 120 ml. Thermometer tubes are made in white back glass tubing to the rigid ASTM specifications 58F and 59F. The complete units are in accordance with American Petroleum Institute Code and American Society for Testing Materials Specifications.



CATALOG NO.		RANGE
PC14-58F	Complete Unit	-30/0/120°F
58F	Refill Only	-30/0/120°F
PC14-59F	Complete Unit	0-180°F
59F	Refill Only	0-180°F

**WEISS INSTRUMENTS, INC.**  
905 WAVERLY AVE., HOLTSVILLE, NY 11742  
TEL: (631) 207-1200 • FAX: 631.207.0900  
[www.weissinstruments.com](http://www.weissinstruments.com)

Distributed by



**A Quality Commitment • Since 1882**  
**Sales Representatives in all Principal Cities**