



- STANDARD RANGES**
- 20 TO 120 °C
  - 20 TO 160 °C
  - 20 TO 180 °C
  - 20 TO 200 °C
- 
- 450 TO 50 °F
  - 320 TO 200 °F
  - 0 TO 250 °F
  - 50 TO 350 °F
  - 50 TO 550 °F
  - 50 TO 750 °F
  - 0 TO 1000 °F
- OTHER RANGES AVAILABLE**

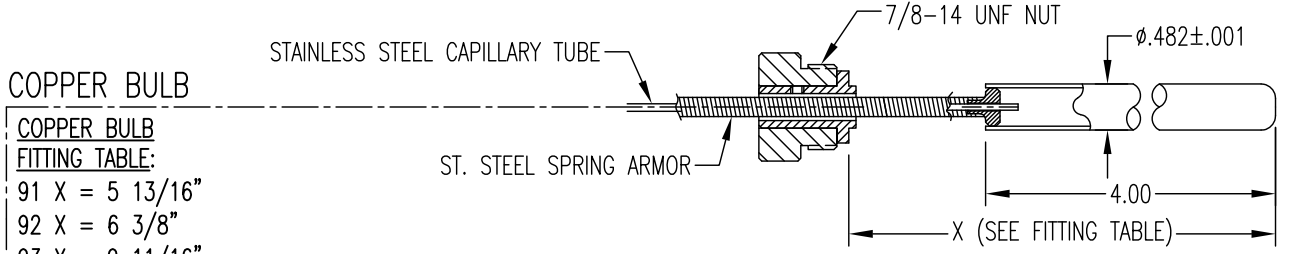

**COPPER BULB FITTING TABLE:**

91	X = 5 13/16"
92	X = 6 3/8"
93	X = 9 11/16"
94	X = 12"

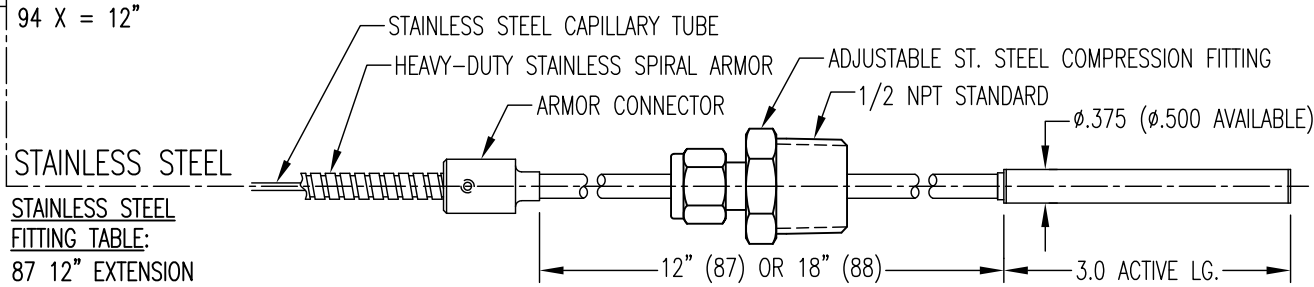

**STAINLESS STEEL FITTING TABLE:**

87	12" EXTENSION
88	18" EXTENSION

**ORDERING INFORMATION**

CODE	CATALOG NUMBER	DESCRIPTION	CODE	CATALOG NUMBER	DESCRIPTION
I	TSG60B TSG60F	CASE MOUNTING	IV	87 88	THERMAL SYSTEM
		BRACKET MOUNT (STANDARD)			ST. STEEL 3/8 X 3.0 12" EXTENSION
II	1S 2S 3S 4S 5S 6S	NUMBER OF SWITCHES	91	91 92 93 94	ST. STEEL 3/8 X 3.0 18" EXTENSION
		1 SWITCH	COPPER .48 X 3.0 - X=5-13/16"		
2 SWITCH	COPPER .48 X 3.0 - X=6-3/8"				
3 SWITCH	COPPER .48 X 3.0 - X=9-11/16"				
III	A B C D E	SWITCH INDICATOR OPTION	V	XX	THERMAL SYSTEM LENGTH
		RIGHT (1S) RIGHT, LEFT (2S)			LENGTH IN FEET
		LEFT (1S), LEFT, RIGHT (2S)	VI	SG EX MH EH (XX)	OPTIONS
		RIGHT, LEFT, LEFT (3S)			SAFETY GLASS
		RIGHT, LEFT, LEFT, LEFT (4S)			EXPLOSION PROOF
		OTHER			MIN/MAX READING HAND
					ELECTRICAL HARNESS W/ DISCONNECT (XX LG IN FEET)

**EXAMPLE: TSG60B 4S 91 D 12 EH12 MH -20/120°C**

NOTE: MIN/MAX HAND NOT AVAILABLE WITH SG OR EX OPTION